RUHAT BANGALORE MAHANAGARA PALIK

YELAHANKA ZONE

BYATARAYANAPURA DIVISION

BYATARAYANAPURA SUB DIVISOIN

Name of Work: MAINTENANCE OF BBMP SMUDAYABAVANA BUILDING AND PROVIDING OF PAINTING ELECTRICAL WORK AT RK HEGADENAGAR IN WARD NO=06 JAKKUR BYATARAYANAPURA SUB DIVISION

Est Cost : 11.86 lakhs

ಅಂದಾಜು ಪಟ್ಟಿಯ ವರದಿ

ವಿಷಯ: ವಾರ್ಡ್ ನಂ. 06(ಜಕ್ಕೂರು) ವ್ಯಾಪ್ತಿಯ MAINTENANCE OF BBMP SMUDAYABAVANA BUILDING AND PROVIDING OF PAINTING ELECTRICAL WORK AT RK HEGADENAGAR IN WARD NO=06 JAKKUR BYATARAYANAPURA SUB DIVISION ಕಾಮಗಾರಿಗೆ ಅನುಮೋದನೆ ನೀಡುವ ಕುರಿತು.

ಉಲ್ಲೇಖ: ಮಾನ್ಯ ಆಡಳಿತಾಧಿಕಾರಿಗಳು, ಬಿಬಿಎಂಪಿ ರವರು ಶಿಕ್ಷಣ ಮತ್ತು ಸಾಮಾಜಿಕ ನ್ಯಾಯ ಸ್ಥಾಯಿ ಸಮಿತಿ ಹಾಗೂ ದಿನಾಂಕ: 08.02.2024ರಂದು ನಡೆದ ಸಭೆಯ ನಡವಳಿಯಂತೆ

ಮೇಲ್ಕಂಡ ವಿಷಯಕ್ಕೆ ಸಂಬಂಧಿಸಿದಂತೆ, ವಾರ್ಡ್ ನಂ. 06(ಜಕ್ಕೂರು) ವ್ಯಾಪ್ತಿಯ **MAINTENANCE OF BBMP SMUDAYABAVANA BUILDING AND PROVIDING OF PAINTING ELECTRICAL WORK AT RK HEGADENAGAR IN WARD NO=06 JAKKUR BYATARAYANAPURA SUB DIVISION** ಕಾಮಗಾರಿಗೆ ರೂ. 11.86 ಲಕ್ಷಗಳ ಅಂದಾಜು ಮೊತ್ತದಲ್ಲಿ 2023-24ನೇ ಸಾಲಿನ ಆಯವ್ಯಯದ ಲೆಕ್ಕಶಿರ್ಷಿಕೆ ಪಿ-1878 ಅಡಿಯಲ್ಲಿ ಕಾಮಗಾರಿಯನ್ನು ನಿರ್ವಹಿಸಲು ಅನುಮೋದಿಸಲಾಗಿರುತ್ತದೆ.

ಅದರಂತೆ ಕಾಮಗಾರಿಯನ್ನು ಕೈಗೊಳ್ಳುವ ಸ್ಥಳ ಪರಿಶೀಲನೆ ಮಾಡಿದ್ದು, ವಾರ್ಡ್ ವ್ಯಾಪ್ತಿಯ ಹೆಗಡೆನಗರದಲ್ಲಿ ಹಾಲಿ ನಿರ್ಮಿಸಿರುವ ಸಮುದಾಯಭವನ ಕಟ್ಟಡದಲ್ಲಿ ಹೆಚ್ಚುವರಿ ಮಹಡಿಯಲ್ಲಿ ಎಲೆಕ್ಟ್ರೀಕಲ್ ಹಾಗೂ ಪೇಂಟಿಂಗ್, ಇತ್ಯಾದಿ ಕಾಮಗಾರಿಯನ್ನು ನಿರ್ವಹಿಸಲು ಅಗತ್ಯ ಅಂಶಗಳನ್ನು ಅಳವಡಿಸಿಕೊಂಡು ಅಂದಾಜು ಪಟ್ಟಿಯನ್ನು PWD SR- 2023-24 ದರಪಟ್ಟಿ ದರಗಳನ್ನು ಅಳವಡಿಸಿ ರೂ. 11.86 ಲಕ್ಷಗಳಿಗೆ ಅಂದಾಜು ಪಟ್ಟಿಯನ್ನು ತಯಾರಿಸಲಾಗಿರುತ್ತದೆ. ಸದರಿ ಅಂದಾಜು ಪಟ್ಟಿಗೆ 2023-24ನೇ ಸಾಲಿನ ಆಯವ್ಯಯದ ಲೆಕ್ಕಶಿರ್ಷಿಕೆ ಪಿ-1878 ಅನುದಾನದಡಿಯಲ್ಲಿ ಅನುಮೋದಿಸಿ, ಕಾಮಗಾರಿ ಸಂಕೇತ ನೀಡಿ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ಆಡಳಿತಾತ್ಮಕ ಅನುಮೋದನೆ, ತಾಂತ್ರಿಕ ಮಂಜೂರಾತಿ ನೀಡಬೇಕಾಗಿ ಹಾಗೂ ಕಾಮಗಾರಿಯನ್ನು ತುರ್ತಾಗಿ ಕೈಗೊಳ್ಳಬೇಕಾಗಿರುವುದರಿಂದ ಟೆಂಡರ್ ಕರೆದು ಗುತ್ತಿಗೆದಾರರನ್ನು ನೇಮಿಸಿ ಕಾರ್ಯದೇಶ ನೀಡಲು ಈ ಮೂಲಕ ತಮ್ಮಲ್ಲಿ ಕೋರಿದೆ.

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿಬಿಎಂಪಿ ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿಬಿಎಂಪಿ ಬೆಂಗಳೂರು-24

BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

Estimate Cost Rs. 1186000.00

NAME OF WORK : MAINTENANCE OF BBMP SMUDAYABAVANA BUILDING AND PROVIDING OF PAINTING ELECTRICAL WORK AT RK HEGADENAGAR IN WARD NO=06 JAKKUR BYATARAYANAPURA SUB DIVISION

Sl. No	Details	unit	Nos	L	B	D	Qty	Rate	Amount
1	Providing and fixing glazing in aluminium door, window, ventilator shutters and partitions etc. with EPDM rubber / neoprene gasket etc. complete as per the architectural drawings and the directions of engineer-in-charge . (Cost of aluminium snap beading shall be paid in basic item):With float glass panes of 8 mm thickness (weight not less than 20 kg/ m²) including cost of materials, labour, usage charges of machinery complete as per specifications(PWD SR 2023-24,								
	SF	W	8	1.50		1.20	14.40		
		v	6	0.60		0.60	2.16		
		m2					**16.56**	**1435.50**	23772.00
	BR	1305							
	area weitage	130.5							
	TOTAL	1435.5							
2	Providing & fixing factory made PVC Door frame of size 50x47mm with a wall thickness of 5mm, made out of extruded 5mm rigid PVC foam sheet metered cut at corners & jointed 2 No.s of 150mm long brackets of 15x15mm M.S Square tube, the entire door frame to be reinforced with 19x19mm M.S Square tube of 19 gauge. The door frame to be fixed to the wall using M.S. Screws of 65/80mm size complete as per manufacturers specification & direction of Engineer-in-								
	FF	D2	8	0.75			6.00		
			8	2.1			16.80		
		RMT					**22.80**	**349.80**	7975.00
	BR	318							
	area weitage	31.8							
	TOTAL	349.8							
3	Providing & fixing 30mm thick factory made rigid foam Prelam Panelled Door Shutters made from M.S. tube of 19x19mm, 19 gauge for stiles and 15x15mm for top & bottom rails, covered with heat moulded Prelaminated PVC C Channel of 5mm thick sheet & 30x50mm wide to form stiles & 5mm thick & 75mm wide Prelaminated PVC Sheets for top rail, lock rail & bottom rail on either side & 5mm thick, 20mm wide cross PVC sheet as gap insert for top rail & bottom rail, Panelling of 5mm thick PVC sheet Prelaminated on either side fitted in the M.S. frame, Sealed to the stiles & rails with PVC Designer beading on either side &								
	SF	D2	8	0.75		2.1	12.60		
		Sqm					**12.60**	**2602.60**	32793.00
	BR	2366							
	area weitage	236.6							
	TOTAL	2602.6							
4	Repair to plaster of thickness 12mm to 20 mm in patches of area 2.5 m² and under, including cutting the patch in proper shape, raking out joints and preparing plastering the wall surface with white cement based polymer modified self curing mortar, including disposal of rubbish, all complete as per the direction of Engineer-								
	hall ceiling		1	20	12		240.00		

		Sqm					**240.00**	**569.80**	**136752.00**
	BR	518							
	TOTAL	51.8							
	TOTAL	569.8							
5	Removing white or colour wash by scrapping and sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete as per specifications and as per directions of Engineer in charge.. (PWD SR 2023-24, VOL II, page No 42 I No 8.6.1)								
	Inside painting								
	Ground floor								
	HALL		2	15.14		3.25	98.41		
			2	14.04		3.25	91.26		
	kitchen and utility		6	4.26		3.25	83.07		
			4	1.20		3.25	15.60		
			4	1.70		3.25	22.10		
	Deduction						**310.44**		
	MD		-1	1.20		2.10	-2.52		
	D1		-2	0.90		2.10	-3.78		
	D2		-2	0.75		2.00	-3.00		
							-9.30		
	First floor								
	HALL		2	15.14		3.25	98.41		
			2	14.04		3.25	91.26		
	kitchen and utility		6	4.26		3.25	83.07		
			4	1.20		3.25	15.60		
			4	1.70		3.25	22.10		
	Deduction						**310.44**		
	MD		-1	1.20		2.10	-2.52		
	D1		-2	0.90		2.10	-3.78		
	D2		-2	0.75		2.00	-3.00		
							-9.30		
	COLUMNS		12	1.30		3.25	50.70		
	CEILING		2	22.86		14.48	662.03		
	CORRIDER CEILING		2	14.48		2.10	60.82		
	WAIST SLAB		6	3.20		1.20	23.04		
		Sqm					**1398.86**	**14.30**	**20004.00**
	BR	13.00							
	area weitage	1.3							
	TOTAL	14.30							
6	Finishing walls with Premium Acrylic Smooth exterior paint with Silicone additives of required shade: New work (Two coats applied @ 1.43 ltr/10 m² over and including priming coat of exterior primer applied @ 2.20 kg/10 m²) with paint of approved quality to give an even shade, after thoroughly brooming the surface to remove all dirt, dust, mortar drops and foreign matter including preparing the surface even and sand paper smooth, cost of materials, labour complete as per specifications and as per directions of Engineer-in-charge.(PWD SR 2023-24, VOL II, page No 46 I No 8.31)								
	out side walls								

	GROUND FLOOR								
	LW		2	22.86	3.45		157.73		
	SW		2	14.48	3.45		99.91		
	Deduction						0.00		
	windows		-8	1.5	1.2		-14.40		
	cladding front		-1	14.48	2.1		-30.41		
	FIRST FLOOR						**212.84**		
	GROUND FLOOR								
	LW		2	22.86	3.45		157.73		
	SW		2	14.48	3.45		99.91		
	Deduction						0.00		
	windows		-8	1.5	1.2		-14.40		
	cladding front		-1	14.48	2.1		-30.41		
	SECOND FLOOR ROOMS						**212.84**		
	LW		2	14.48	3.45		99.91		
	SW		2	4.2	3.45		28.98		
	Deduction						0.00		
	windows		-2	1.5	1.2		-3.60		
	DOOR		-2	1	2.1		-4.20		
							121.09		
	PARAPET		6	14.48	1		86.88		
	HEAD ROOM		6	2.1	3.45		43.47		
			6	3.35	3.45		69.35		
	COMPOUND WALL		4	50	2.3		460.00		
			2	16	2.3		73.60		
	FRONT ROOMS		1	25	3.45		86.25		
			1	3.9	3.45		13.46		
							833.00		
		Sqm					**1379.77**	**195.80**	270159.00
	BR	178.00							
	area weitage	17.8							
	TOTAL	195.80							
7	Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade :New work (two coats) over and including water thinnable priming coat with cement primer after thoroughly brooming the surface to remove all dirt, dust, mortar drops and foreign matter including preparing the surface even and sand paper smooth, cost of materials, labour complete as per specifications and as per directions of Engineer-in-charge. (PWD SR 2023-24, VOL II, page No 45 I No 8.25)								
	FF								
	Qty as same as inside WHITE WASH						1398.86		
		Sqm					**1398.86**	**150.70**	210808.00
		Sqm							
	BR	137.00							
	#REF!	13.7							
	TOTAL	150.70							

8	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade :Two coats on new work over an under coat of suitable shade with ordinary paint of approved brand and manufacture after thoroughly brooming the surface to remove all dirt, dust, mortar drops and foreign matter including preparing the surface even and sand paper smooth, cost of materials, labour complete as per specifications and as per directions of Engineer-in-charge.(PWD SR 2023-24, VOL II,,P.NO-48), I.NO-8.41)								
	SF	W	26	1.50		1.20	46.80		
		V	6	0.60		0.60	2.16		
		D	1	1.20		2.10	2.52		
	COMPOUND WALL		4	50.00		0.60	120.00		
	RAILINGS		6	3.20		1.00	19.20		
							190.68		
		Sqm		190.68	X	2.50	**476.70**	**183.70**	87570.00
	BR	167.00							
	area weitage	16.7							
	TOTAL	183.70							
	ELECTRICAL WORK								
9	Supplying and fixing PVC/metal conduit Deep junction box 25 mm deep Junction box (PWD Electrical SR 2023-24 Item No: 1.5.2 P.No.3)								
			1	15			15		
		EACH					15	**61.60**	**924.00**
	BR	56.00							
	area weitage	5.6							
	TOTAL	61.60							
10	Supplying And Fixing Metal Fan Box with Round Hook(PWD Electrical SR 2023-24 Item No: 1.13 P.No.4)								
			1	15			15		
		EACH					15	**128.70**	**1930.50**
	BR	117.00							
	area weitage	11.7							
	TOTAL	128.70							
11	Supplying and wiring adopting loop system in existing PVC Conduit /casing capping using 2x1.5Sqmm (Phase & Neutral) & 1x1.0 sqmm (Earth wire) FRLS multi strand PVC insulated copper wire (confirming to IS-694: and latest amendments) with a 6Amps flush type SP control switch shall be fixed on the existing plastic sheet/ gang box, the other end of the wires shall be terminated with sufficient loose length in a wood/PVC round block. complete for each outlet .Long point above 6Mtr upto 10Mtr from tapping point to out let via switch (PWD Electrical SR 2023-24 Item No: 2.1.3 P.No.5)								
			1	10			10		
		EACH					10	**957.00**	**9570.00**
	BR	870.00							
	area weitage	87							
	TOTAL	957.00							

12	Wiring for lighting/power circuit using one of FRLS PVC insulated 1100V grade, multistrand copper wire with low conductor resistance single core in open or concealed system of wiring with specified IS- 694:2010 1.5MM2(PWD Electrical SR 2023-24 Item No: 2.3.2 P.No.5)								
			1	15			15		
		M					15	**28.60**	**429.00**
	BR	26.00							
	area weitage	2.6							
	TOTAL	28.60							
13	Supplying 6A flush type socket and 6 A flush type SP switch either surface/flush mounting in existing gang box or in 4mm thick plastic sheet and fixing over a flush mounted wooden box and wiring using necessary capacity wires as required as per IS 1293 and IS 38546A 3/5 Way (PWD Electrical SR 2023-24 Item No: 3.1.2 P.No.8)								
			1	15			15		
		EACH					15	**161.70**	**2425.50**
	BR	147.00							
	area weitage	14.7							
	TOTAL	161.70							
14	Supplying and flush mounting powder coated / galvanized metal box suitable for mounting modular switch plates. The box should be firmly flush mounted after due groove cutting in Brick/Stone/C.C wall 10-12 Way(PWD Electrical SR 2023-24 Item No: 3.4.6 P.No.8)								
			1	15			15		
		EACH					15	**350.90**	**5263.50**
	BR	319.00							
	area weitage	31.9							
	TOTAL	350.90							
15	Supplying 4mm thick plastic sheet with necessary nitches for fixing switches, regulators etc, and fixing on existing wooden or metal box using N.F. screws(PWD Electrical SR 2023-24 Item No: 3.8 P.No.9)								
			1	2000			2000		
		Cm2					2000	**0.45**	**902.00**
	BR	0.41							
	area weitage	0.041							
	TOTAL	0.45							
16	Supplying and fixing of modular switch & connected accessories on existing modular switch plate as per IS 3854 and IS 1293Stepped Fan Regulator Two Module (PWD Electrical SR 2023-24 Item No: 3.6.4 P.No.9)								
			1	10			10		
		each					10	**392.70**	**3927.00**
	BR	357.00							
	area weitage	35.7							
	TOTAL	392.70							
17	Supplying and fixing of modular switch & connected accessories on existing modular switch plate as per IS 3854 and IS 1293.. -6A One Way Switch (PWD Electrical SR 2023-24 Item No: 3.6.7 P.No.9)								

			1	8			8		
		each					8	**198.00**	**1584.00**
	BR	180.00							
	area weitage	18							
	TOTAL	198.00							
18	Supply of round/square recess/surface mounted rolling type LED Down light with ..... W GU 10 LED Lamp Rib Fabricated from diecast aluminium with white powder coated prewired to mains connector & has swivelling unit of aluminium die cast eye ball & LED Lamp position retained by circular wire spring, with Life of 25000 burning hours & 70% lumen maintenance with CRI > 80. Power Input: 220-240V @50/60Hz & Power factor >0.9 along with CE approved. 2years Warranty against any manufacturing defect working under standard electrical condition LED square or round down light 15-18W(PWD Electrical SR 2023-24 Item No: 11.5.3 P.No.44)								
			1	35			35		
		each					35	**1838.10**	64333.50
	BR	1671.00							
	area weitage	167.1							
	TOTAL	1838.10							
19	Supplying of Ceiling Fan with Capacitor rating As per guideline of BEE 5 star rating and IS:374/19 and also comply with IS: 1709/1984 with latest amendment, Rated voltage 220 V/50 Hz, Rated power upto 35 W +/- 10 %, Rated current As per IS:374/19, Rated power factor 0.9 lagging(min), Rated speed 350 +/- 10% RPM, Rated air delivery 210 +/- 10% Cubic Meter Minimum, Rated service value 6.2 CMM / W, Three Blades of blade leaf 1.05 mm thick Aluminium Alloy sheet, Class B motor insulation, Bearing Two ball bearings, Top 6202, Bottom 6201, as per IS specification, Motor winding. Temp rise Shall not exceed 75 deg C over and ambient of 40 0C by resistance method at 245 V, Insulation resistance Shall not be less than Two Mega Ohms (2M Ohms), Leakage current Should not exceed 210 Micro Amp, Power input, W& current, Air Delivery & Fan Speed as per IS:374/2019 with latest amendment, 2year manufacturer Warranty. (BLDC fans)(PWD Electrical SR 2023-24 Item No: 6.4.2 P.No.30)56" Sweep 5 Star (1400 mm)								
			1	5			5		
		each					5	**4129.40**	**20647.00**
	BR	3754.00							
	area weitage	375.4							
	TOTAL	4129.40							
	plumbing work								
20	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings, including fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and testing of joints complete as per direction of Engineer in Charge. Internal work - Exposed on wall(PWD SR 2023-24, VOL 2, PG No-122, I.NO-13.32.1)15 mm nominal dia pipes								
			1	40			40		
		m					40	**339.90**	**13596.00**

	BR	309.00							
	area weitage	30.9							
	TOTAL	339.90							
21	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings, including fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and testing of joints complete as per direction of Engineer in Charge. Internal work - Exposed on wall(PWD SR 2023-24, VOL 2, PG No-122, I.NO-13.32.4)32 mm nominal dia pipes								
			1	20			20		
		m					20	**612.70**	**12254.00**
	BR	557.00							
	area weitage	55.7							
	TOTAL	612.70							
22	Providing and fixing white vitreous china pedestal type water closetb (European type W.C. pan) with seat and lid, 10 litre low level white P.V.C. flushing cistern, including flush pipe, with manually controlled device (handle lever), conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required :(PWD SR 2023-24, VOL 2, PG No-131, I.NO-14.2.1)W.C. pan with ISI marked white solid plastic seat and lid								
			1	5			5		
		each					5	**5321.80**	**26609.00**
	BR	4838.00							
	area weitage	483.8							
	TOTAL	5321.80							
23	Providing and installing at site of work P.V.C. pipes including cost of pipes and specials and labour, including lowering into trenches, laying true to line, level and perfect linking at joints leak proof including jointing of approved type with all labour charges and all lift charges, handling charges including encasing the pipe around to a depth not less than 15 cms with gravel or selected earth available from the excavation etc. complete.90mm(weight of pipe -0.917 kg) (PWD SR 2023-24 Vol-V Page No.120, Item No.10.14.3)								
			1	34			34		
		m					34	**231.00**	7854.00
	BR	210.00							
	area weitage	21							
	TOTAL	231.00							
24	Providing and fixing white vitreous china wash basin including making all connections but including the cost of fittings (PWD SR 2023-24, VOL 2, PG No135, I.NO-14.25.6)								
			1	5			5		
		each					5	**1800.70**	9003.50
	BR	1637.00							

	area weitage	163.7							
	TOTAL	1800.70							
25	Extra for providing opening of required size & shape for wash basin/ kitchen sink in kitchen platform, vanity counter a providing opening of required size & shape for wash basin/ kitchen sink in kitchen platform, vanity counter and similar location in Granite, including necessary holes for pillar taps etc. including moulding, rubbing and polishing of cut edges etc. complete. (PWD SR 2023-24, VOL 2, PG No 69, I.NO-10.4)								
			1	38			38		
		each					38	**650.10**	24703.80
	BR	591.00							
	area weitage	59.1							
	TOTAL	650.10							
									995789.30
27	Add 18 % GST								179242.07
28	ADD 1% PMC CHARGES								9957.89
29	missallanious & rounding off								1010.73
									1186000.00
	ELEVEN LAKHS EIGHTY SIX THOUSAND ONLY								

CERTIFICATE:

1) The work spot has been inspected and found to be necessary
2) The work spot comes under B.B.M.P
3) The provisions made in the estimate are necessary and minimum
4) The estimate is based on PWD 2023-2024, Issue rates and Data Rates.

Assistant Engineer

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ ಬಿ ಎಂ ಪಿ ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

Assistant Executive Engineer
Byatarayanapura Sub Division

ಸಹಾಯಕ ಕಾರ್ಯನಿರ್ವಾಹಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿ ಬಿ ಎಂ ಪಿ ಬೆಂಗಳೂರು-26

Executive Engineer
Byatarayanapura Division

ADMINISTRATIVE SANCTION

Accorded for Rs. 11:86 Lakhs

Head of A/c. P1878

Div. Ref. No. 60 Date 08/02/24

AE/DM EE(BTP) BBMP

TECHNICAL SANCTION

Accorded for Rs. 11:86 Lakhs

Head of A/c. P1878

Div. Ref. No. 33 Date 08/02/24

AE/DM EE(BTP) BBMP

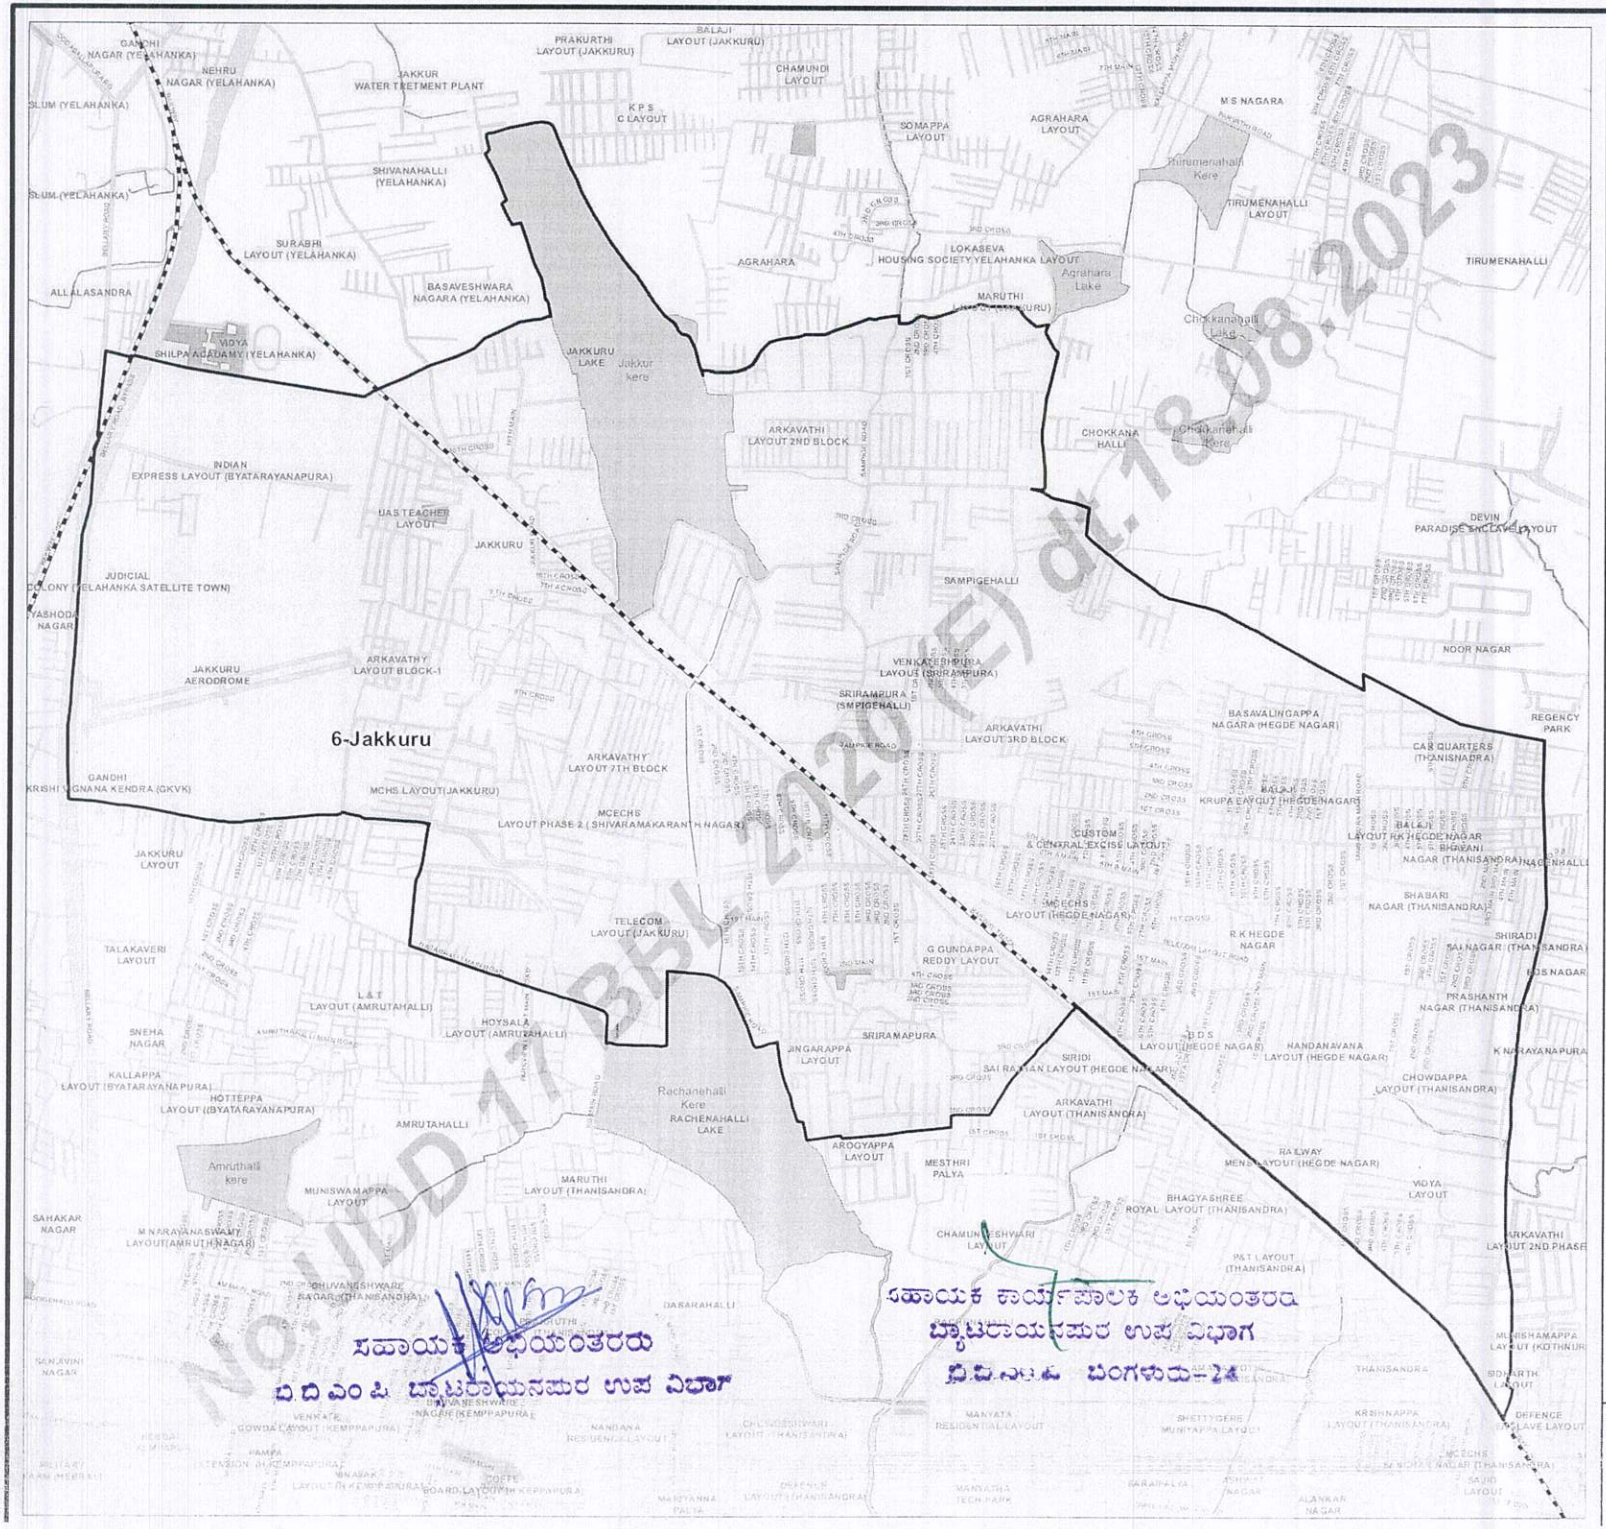

N

W E

S

Delimitation of Wards in BBMP - 2023

Ward Name

6-Jakkuru

Legend

- Delimited Ward Boundary
- Delimited Ward Area
- Road
- Railwayline
- Park
- Tank/ Pond/ Storm Water Drain

152- Byatarayanapura AC

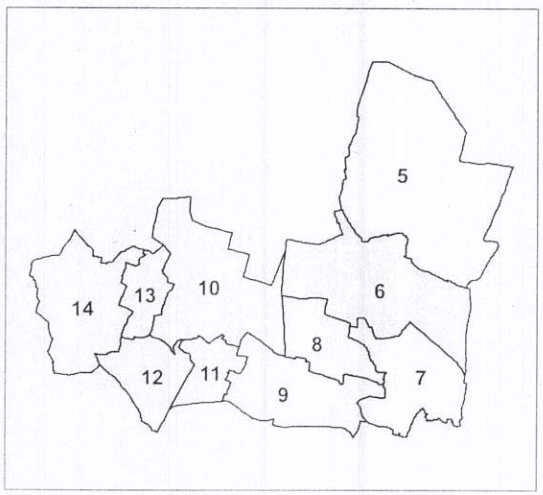

Government of Karnataka Notification
No.UDD 17 BBL 2020 (E) dt.18.08.2023

Delimitation Commission

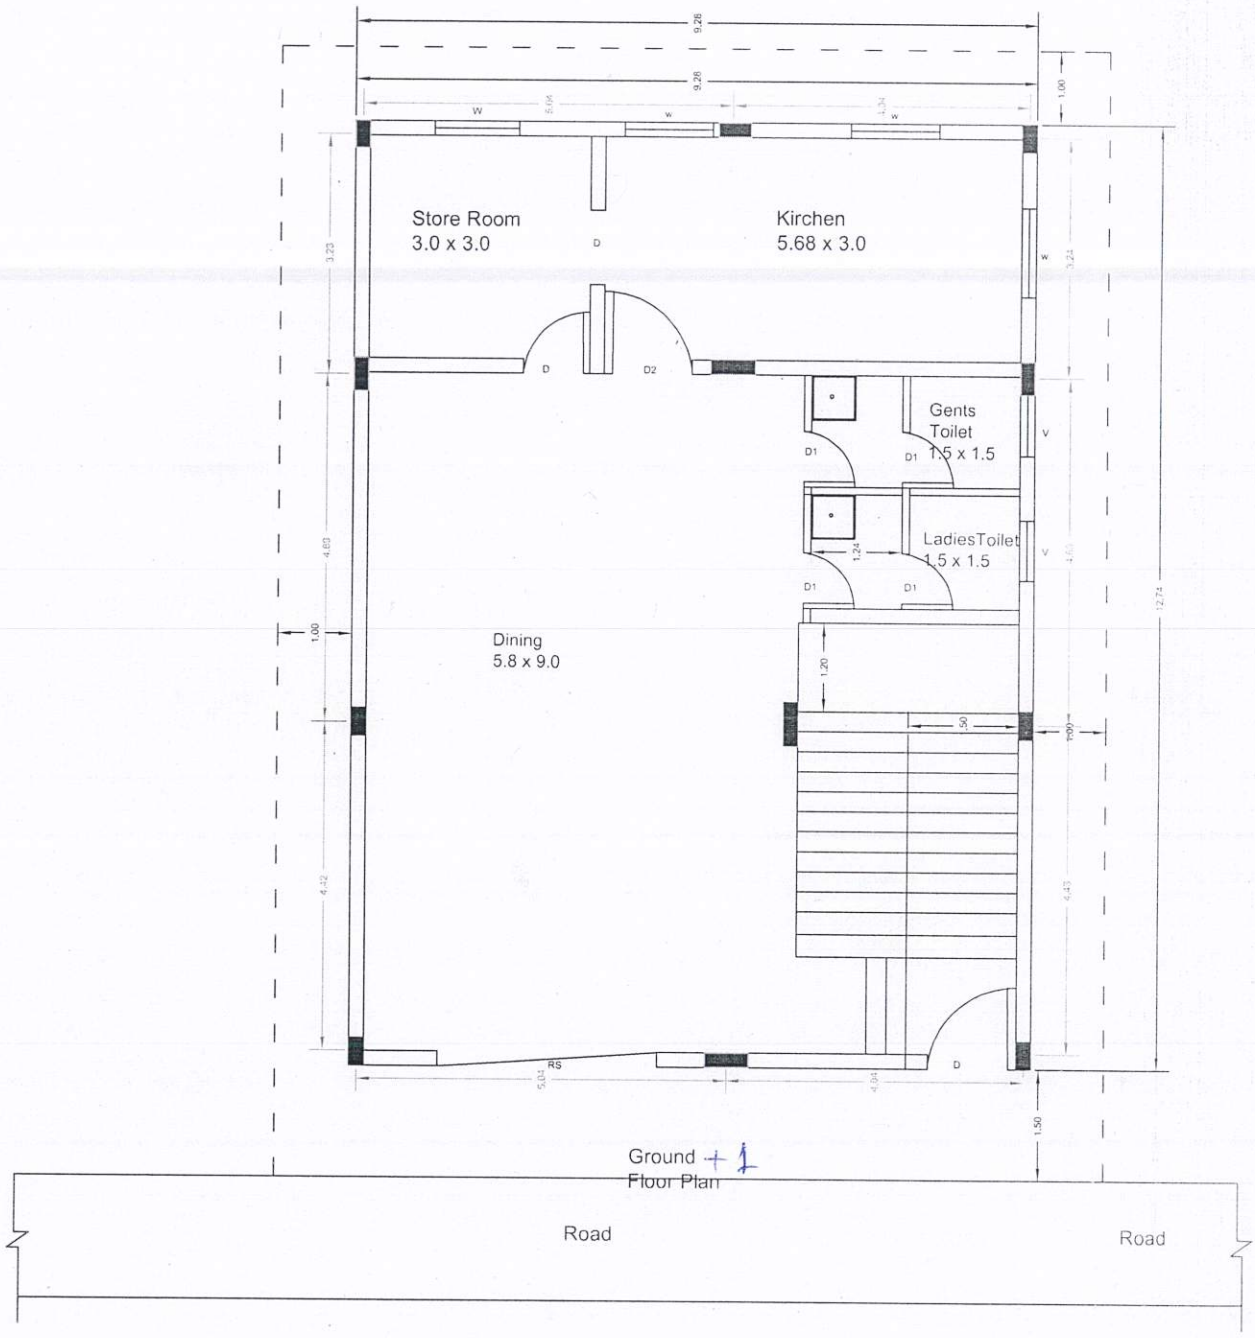

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿ.ಬಿ.ಎಂ.ಪಿ ಬೆಂಗಳೂರು-26

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿಬಿಎಂಪಿ ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರ
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿಬಿಎಂಪಿ ಬೆಂಗಳೂರು-26

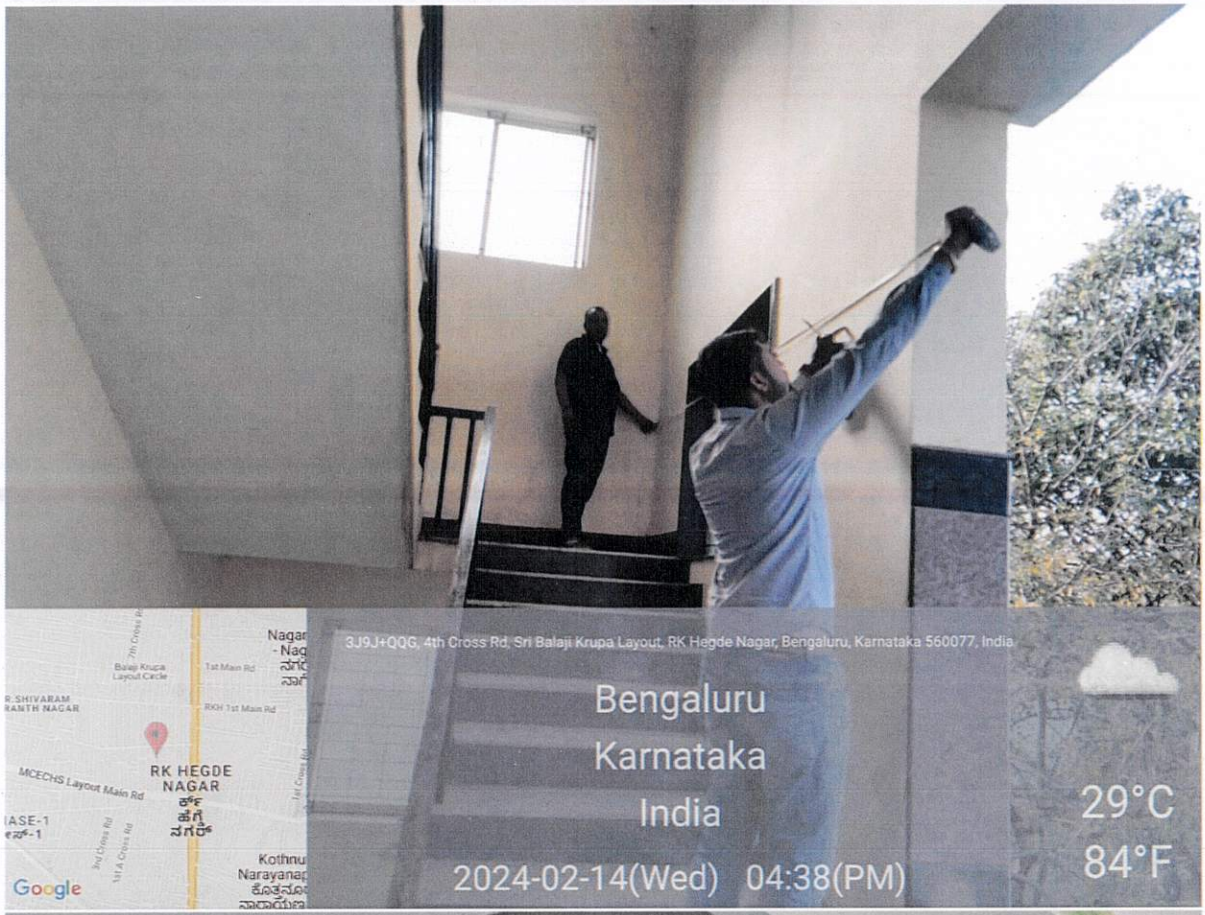

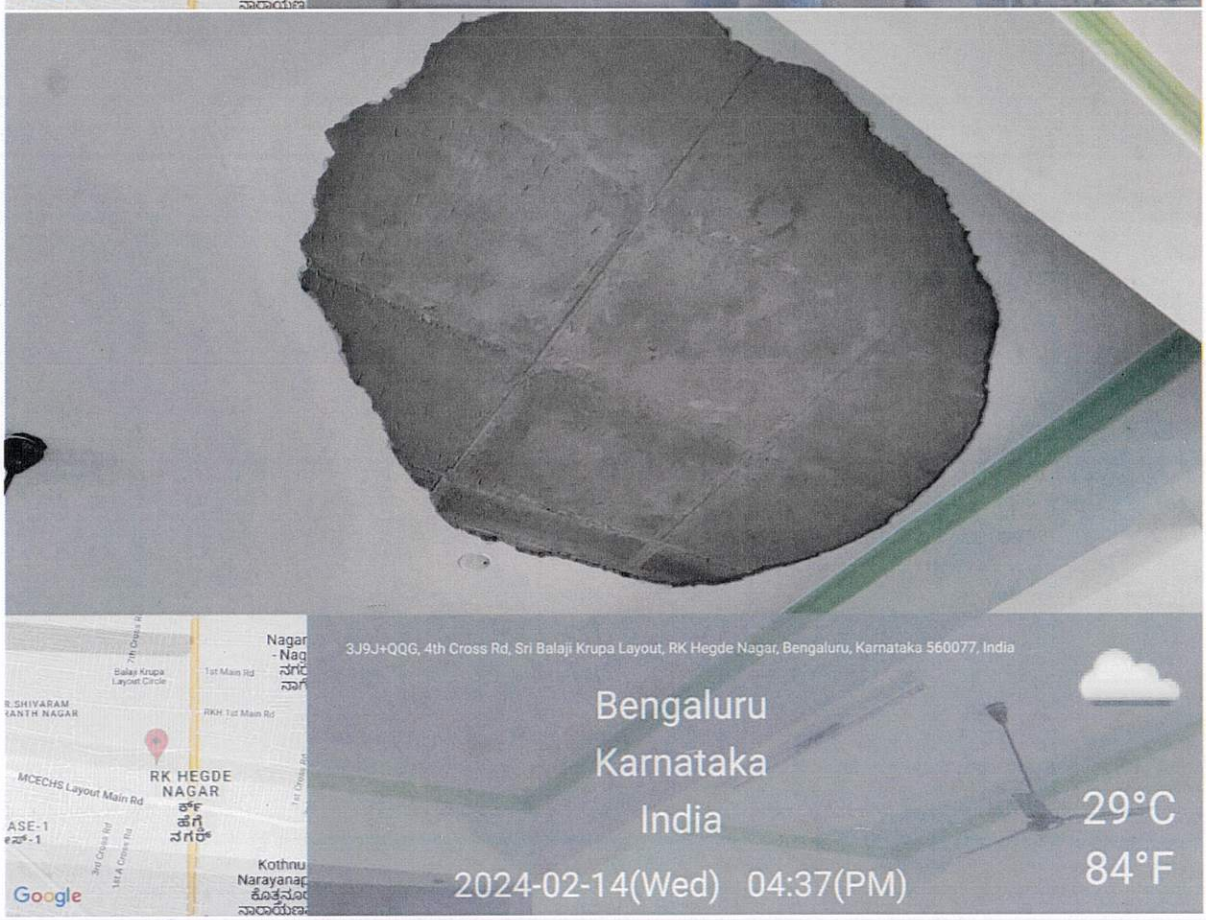

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿಬಿಎಂಪಿ ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿಬಿಎಂಪಿ ಬೆಂಗಳೂರು-26

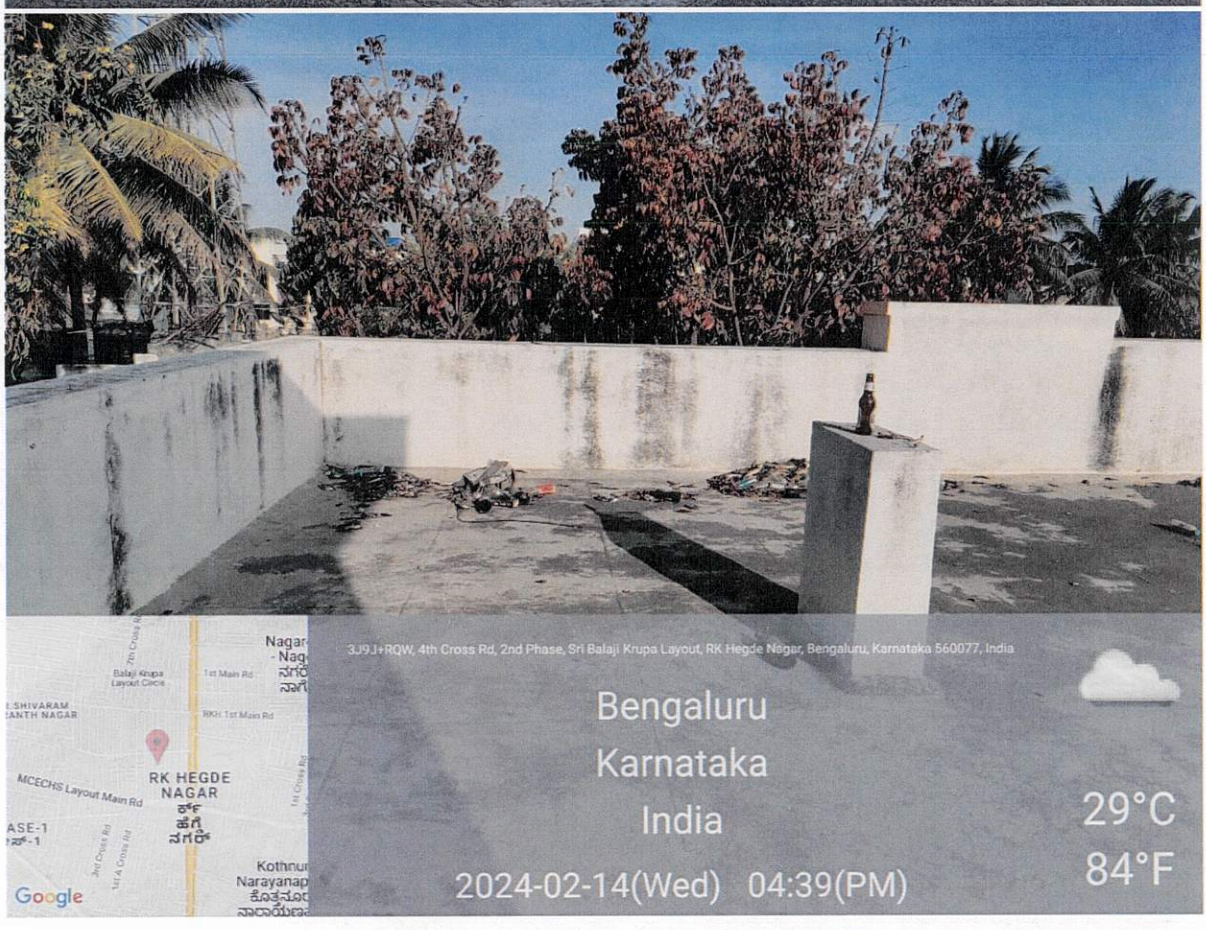

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿಬಿಎಂಪಿ ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿಬಿಎಂಪಿ ಬೆಂಗಳೂರು-26